



Wirewound Rodcore Inductor – SR Series

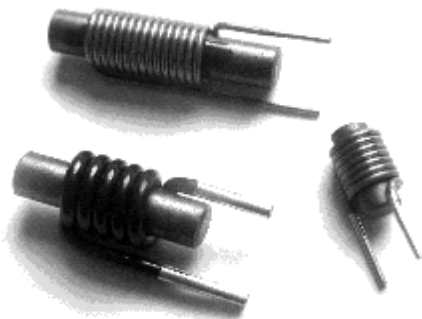


Features

- For high current
- Printed circuit mounting
- For switching regulators, power supplies, amplifiers, monitors, UPS, etc.

Ordering Information

SR 0410-5R6 K

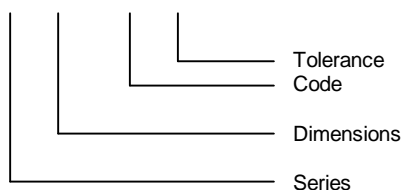

Characteristics & Dimensions

Part No.	A	B	C(min)	G(min)	Inductance (μH)	IDC (A)	Test Frequency (KHz)
SR0410	4.0 ± 0.3	10.0 ± 0.3	3.4	0.5	0.5 ~ 1.0	13	1
SR0415	4.0 ± 0.3	15.0 ± 0.3	3.4	0.5	0.5 ~ 1.2	15	1
SR0420	4.0 ± 0.3	20.0 ± 0.3	3.4	0.5	0.5 ~ 3.0	18	1
SR0515	5.0 ± 0.3	15.0 ± 0.3	3.4	0.5	0.5 ~ 4.0	18	1
SR0520	5.0 ± 0.3	20.0 ± 0.3	3.4	0.5	0.5 ~ 7.0	18	1
SR0525	5.0 ± 0.3	25.0 ± 0.3	3.4	0.5	0.5 ~ 10	18	1
SR0610	6.0 ± 0.3	10.0 ± 0.3	3.4	0.5	0.5 ~ 1.5	18	1
SR0615	6.0 ± 0.3	15.0 ± 0.3	3.4	0.5	0.5 ~ 5.0	18	1
SR0620	6.0 ± 0.3	20.0 ± 0.3	3.4	0.5	0.8 ~ 5.0	18	1
SR0625	6.0 ± 0.3	25.0 ± 0.3	3.4	0.5	1.0 ~ 27	15	1
SR0630	6.0 ± 0.3	30.0 ± 0.3	3.4	0.5	1.0 ~ 22	18	1
SR0820	8.0 ± 0.3	20.0 ± 0.3	3.4	0.5	1.0 ~ 33	18	1