


Ferrite Bead – SDRH Series

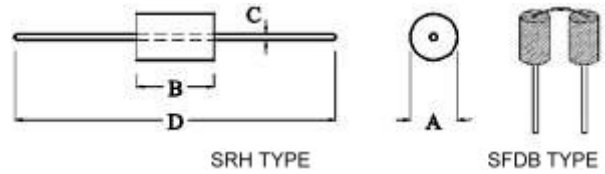

Features


- Decreased DCR resistance
- Increased current capacity
- 25% impedance tolerance

Package

SDRH Series	SFDB Series
5000pcs. / Reel	1000pcs. / Bag
1000pcs. / Box	4000pcs. / Box

Ordering Information

K5A SDRH – 2.5x3.0x0.8

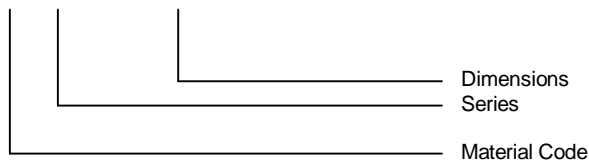

Characteristics

Part No.	Impedance (Ω)		Mat.Code	Dimensions (mm)			
	25MHz	100MHz		A	B	C	D
SDRH2.5x3.0x0.8	25	50	K5A	2.5	3.0	0.65	62.5
SDRH3.5x3.0x0.8	30	50	K5A	3.5	3.0	0.65	62.5
SDRH3.5x4.5x0.8	30	60	K5A	3.5	4.5	0.65	62.5
SDRH3.5x4.7x0.8	35	60	K5A	3.5	4.7	0.65	62.5
SDRH3.5x4.7x0.8	50	60	NP22D	3.5	4.7	0.65	62.5
SDRH3.5x5.0x0.8	40	70	K5A	3.5	5.0	0.65	62.5
SDRH3.5x6.0x0.8	50	75	K5A	3.5	6.0	0.65	62.5
SDRH3.5x6.0x0.8	40	90	C8	3.5	6.0	0.65	62.5
SDRH3.5x6.0x0.8	60	75	NP22D	3.5	6.0	0.65	62.5
SDRH3.5x7.5x0.8	60	90	K5A	3.5	7.5	0.65	62.5
SDRH3.5x8.0x0.8	60	100	K5A	3.5	8.0	0.65	62.5
SDRH3.5x8.0x0.8	60	130	C8	3.5	8.0	0.65	62.5
SDRH3.5x9.0x0.8	80	120	K5A	3.5	9.0	0.65	62.5
SDRH3.5x9.0x0.8	75	150	C8	3.5	9.0	0.65	62.5
SFDB3.5x6.0x0.8	90	150	K5A	3.5	6.0	0.65	62.5
SFDB3.5x4.7x0.8	75	135	K5A	3.5	4.7	0.65	62.5

Customer designs available.