



Leaded Line Filter – SQT02 Series

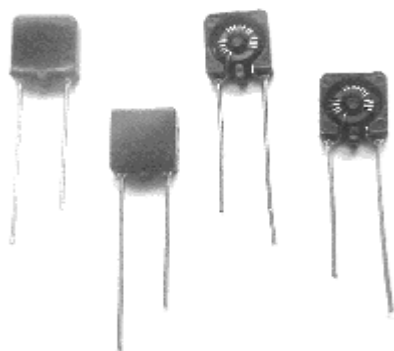


Features

- Unique configuration
- Ideal for EMI countermeasures
- Shapes and dimensions follow E.I.A. Spec.
- Excellent soldering ability and heat resistance
- High reliability

Ordering Information

SQT-02 251

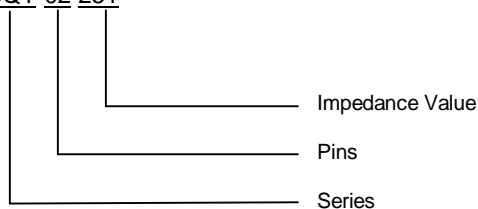

Dimensions

Part No.	A	B	C	D	E	F	G
SQT-02	8.0 Max.	9.5 Max.	3.5 Max.	4.5 ± 0.5	15.0 ± 0.10	19.0 ± 0.15	0.6 REF

Characteristics

Part No.	Inductance (μH) @1KHz/1.0V	Impedance (Ω) Min.	Rated Voltage (V)	DC Resistance (mΩ) Max.	IDC (A)	Test Frequency (MHz)
SQT-02251	4.7	250	50	20	0.20	100
SQT-02401	8.2	400	50	25	0.20	100
SQT-02501	33	500	50	35	0.50	100
SQT-02801	40	800	50	40	0.50	100
SQT-02122	60	1200	50	58	0.50	100
SQT-02152	80	1500	50	62	0.50	100
SQT-02172	100	1700	50	95	0.50	100
SQT-02202	120	2000	50	100	0.50	100