



## SMD Common Mode Bead – SSMB Series

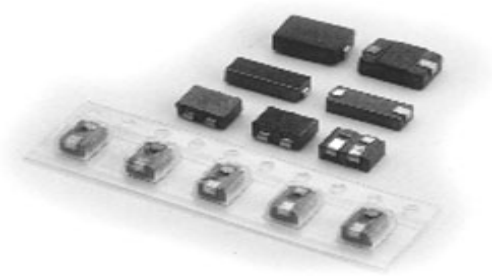

### Shapes

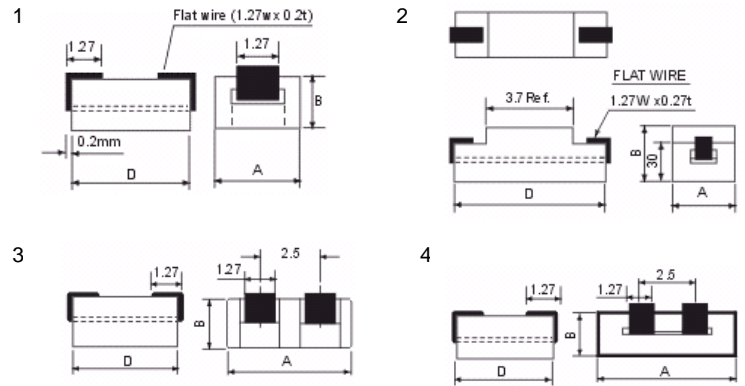


### Features

- Supplied taped and reeled per EIA standard
- Applications: Computer disk drive and PC board to filter the EMI from outside source. Car radio, mobile phone.

### Ordering Information

SSMB 03-562545 -2H

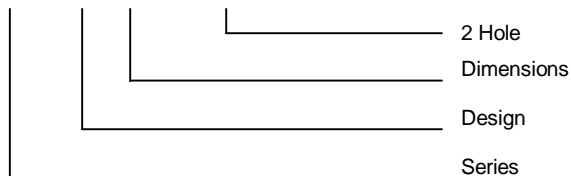

### Characteristics

Part No.	Shape	A	B	D	Impedance ( $\Omega$ ) min		Curve
					25MHz	100MHz	
SSMB13-302540	1	3.18	2.67	$4.0 \pm 0.25$	24	36	1
SSMB12-302585	1	3.18	2.67	$8.5 \pm 0.25$	48	72	2
SSMB03-472976	2	$5.0 +0 -0.5$	$3.45 +0 -0.3$	$7.6 \pm 0.1$	60	90	3
SSMB13-472976	2	$5.0 +0 -0.5$	$3.45 +0 -0.3$	$7.6 \pm 0.1$	58	80	4
SSMB13-562540-2H	3	$5.6 \pm 0.2$	$2.5 \pm 0.2$	$4.0 \pm 0.25$	22	35	5
SSMB03-562545-2H	3	$5.6 \pm 0.2$	$2.5 \pm 0.2$	$4.5 \pm 0.25$	24	36	6
SSMB04-562545-2H	3	$5.6 \pm 0.2$	$2.5 \pm 0.2$	$4.5 \pm 0.25$	18	36	7
SSMB50-562545-2H	3	$5.6 \pm 0.2$	$2.5 \pm 0.2$	$4.5 \pm 0.25$	24	32	8
SSMB47-562585-2H	3	$5.6 \pm 0.2$	$2.5 \pm 0.2$	$8.5 \pm 0.25$	24	35	9
SSMB47-572685-1H2W	4	$5.7 +0.1 -0.5$	$2.6 +0.1 -0.2$	$8.47 \pm 0.1$	48	70	10
SSMB47-562540-2H	3	$6.0 \pm 0.2$	$2.5 \pm 0.2$	$4.0 \pm 0.25$	24	35	11